

# LINEA STERILIZATION CENTER



# Item #: ALSTR 06B-000-000






Cover Page	
Unpacking	I-(
Utilities Location	I-:
Base Cabinets	I-2
Achorbolt Layout Full Scale	I-3
Upper Cabinets	I-4
Countertop & Hardware	I-5
Final Assembly	I-6
Sales Drawing Render	S-(
Sales Drawing	S-:



# Install - Unpacking

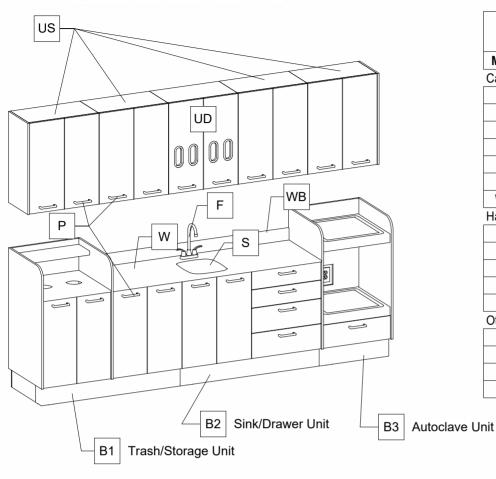

Packing List			
Mark	Description	Qty	
Cabine	try		
В1	Trash/Storage Unit	1	
B2	Sink/Drawer Unit	1	
В3	Autoclave Unit	1	
UD	Upper Dispense Cabinet	1	
US	Upper Cabinet	4	
W	Work Surface	1	
WB	Backsplash	1	
Hardwa	are	•	
	#12 3" Wood Screws	40	
	#14 1-1/4" Cabinet Screws	4	
	Sex/Sleeve Bolt	20	
	Wedge Anchor Bolts	6	
Р	Door/Drawer Pull	21	
Other			
	Strainer	1	
	Tube of Caulk	1	
F	Faucet	1	
S	Undermount Sink	1	


**Skid A** contains: Trash & Storage Cabinets pre-attached to each other and a Toe Kick.

**Skid B** contains: Sink & Drawer Cabinets pre-attached to each other and a Toe Kick.

**Skid C** contains: Autoclave Cabinet pre-attached to a Toe Kick.

**Skid D** contains: All Wall cabinets, work surface and back splash.

- 1. Remove all packing material.
- 2. REMOVE HARDWARE PACK FROM SINK BASE ON **SKID B**.

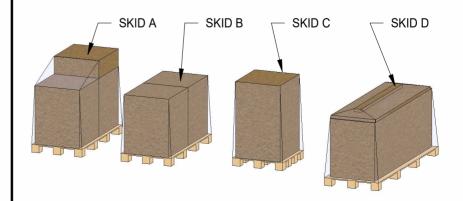

NOVA Solutions Inc.


217-342-7070

sales@novasolutionsinc.com

Install - Utilities Location

Backers			
Description	Length		
2x6 Backer	10' - 1 9/32"		
2x6 Backer	10' - 1 9/32"		
2x6 Backer	10' - 1 9/32"		
2x6 Backer	10' - 1 9/32"		
	40' - 5 3/32"		

Plumbing Utilities -by others-		
Mark	Description	Qty
Н	Hot Water Supply	1
С	Cold Water Supply	1
D	Sanitary DWV	1

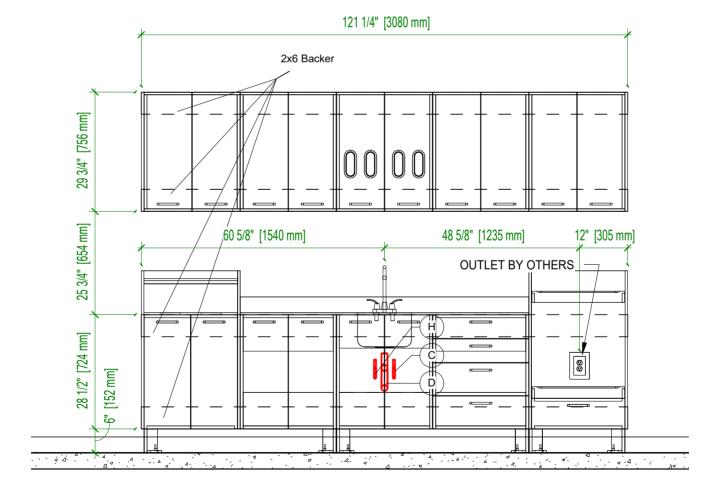

### INSTALL TOE KICK ASSEMBLIES


1. Using Template **<u>Drawing I-3t</u>**, Drill anchor bolt holes (3/8" dia x 2" min) into floor as the designated locations (shown in BLUE).

Note: Toe kick leveling glides can be adjusted (top-down access) with flat head or 7/32 socket. ALL LEVELING GLIDES ARE PRE-INSTALLED ON TOE KICKS


2. Place anchors through toe kick into drilled holes for all toe kick sections. [Detail A]


Note: Do not secure anchors to allow movement until final assembly/leveling is completed

- 3. Attach to B2 to B1 with sex/sleeve bolt set (4) [DETAIL SSB]
- 4. Attach to B2 to B3 with #14 x 1-1/4" screw set (4) **[DETAIL CTC]**
- 5. Attach to solid wall blocking/studs with #12-3" wood screws. **[DETAIL CWS]**









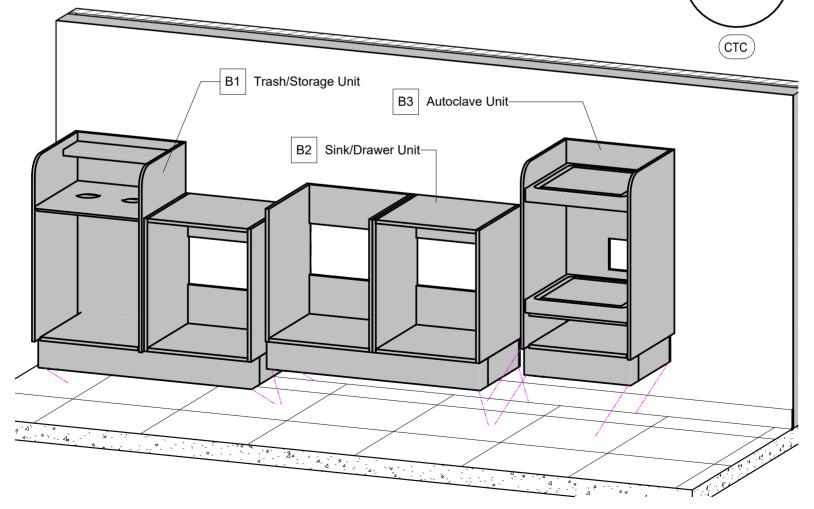

# Install - Upper Cabinets







#### **INSTALL BASE CABINET**

- 1. Remove all doors & drawers.

  Doors/drawers are matching/coordinated sets. Keep track of where each was removed. Doors & drawers must be reinstalled in same configuration at end of assembly.
- 2. Place left most wall cabinet on wall as shown and attach to solid wall blocking/studs with #12-3" wood screws. **[DETAIL CWS]**
- 3. Repeat for remainder for remiander of wall cabinets as shown and connecting them to each other with sex/sleev bolt set **[DETAIL SSB]**

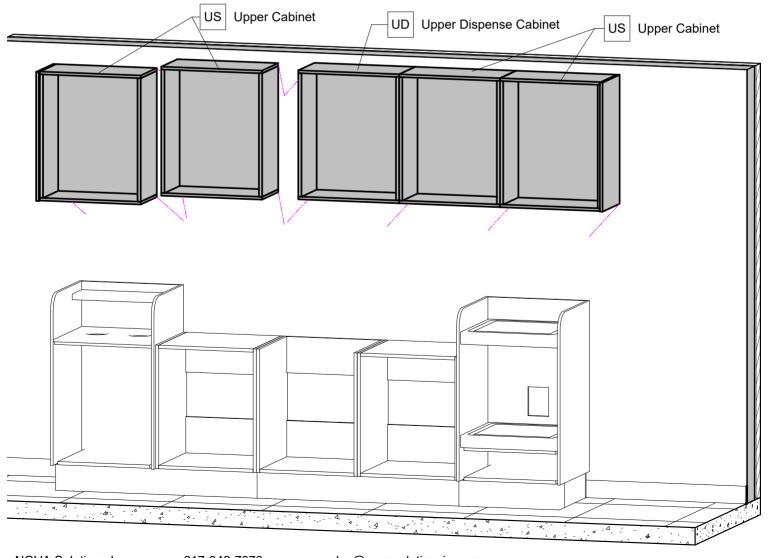


Install - Countertop & Hardware



#### **INSTALL COUNTERTOP TO SINK BASE CABINET**

- 1. Install Sink, Faucet, Strainer.
  - \*\*Apply provided silicone to the sink prior to installing\*\*
- 2. Place Countertops on respective base cabinets.
  - \*\*Apply provided silicone to secure work surface to base cabinet\*\*

\*\*NOTE: FINAL PLUMBING CONNECTIONS BY OTHERS\*\*

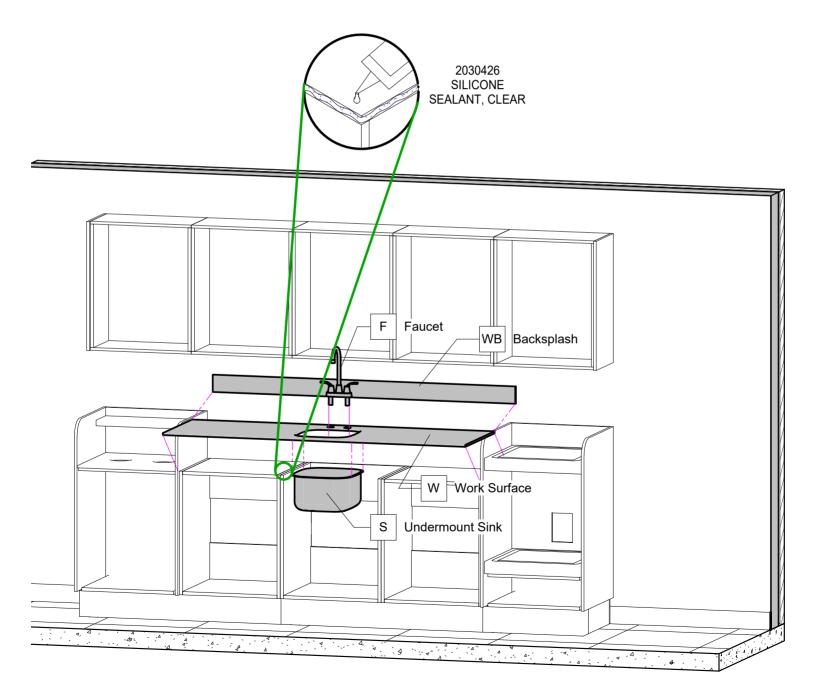

NOVA Solutions Inc.


217-342-7070

sales@novasolutionsinc.com

Install - Final Assembly

# \*\*NOTE: FINAL ELECTRICAL & PLUMBING CONNECTIONS BY OTHERS\*\*

- 1. REINSTALL DOORS/DRAWERS IN ORIGINAL POSITIONS FROM WHERE THEY WERE REMOVED.
- 2. Attach Door/Drawer Pulls and remaining components as needed.
- 3. ADJUST TOE-KICK LEVELERS AND TIGHTEN ANCHOR NUTS.
- 4. CHECK FOR ALIGNMENT OF DOORS & DRAWERS, FINAL ADJUSTMENTS MAY BE NECCESSARY.

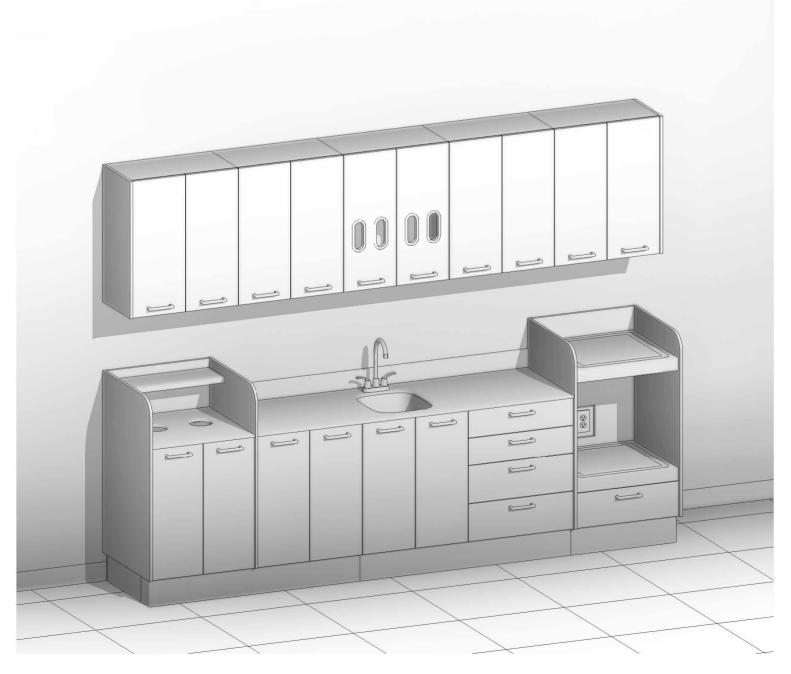

NOVA Solutions Inc.

217-342-7070

sales@novasolutionsinc.com