

Curved Top AV Lecterns

Base Model



Model Number Structure

66 - LC

304241

LM

Series

Type

Size

Modesty Combination for

66=Lectern

LC= Lectern
with Curved
Top

D x W x H

Laminate modesty
LM=Laminate modesty
Perforated Metal modesty
MM=Metal modesty



(217) 342-7070

www.novadesk.com

sales@novasolutionsinc.com

Curved Top AV Lecterns

1. Select model number

Ex: 66-LC304241LM
(30x42x41 Curved Top AV Lectern with laminate modesty)

2. Select laminate color for base and worksurface


If ordering with perforated metal modesty, select metal color

Note: Laminate modesty will match base color.

Ex: 567 567
Base Worksurface

Available with most Visual Display Options

(30" W lecterns are not available with Trolley™ EXL or 21x24 Downview™)



14 RU rack rails

D x W x H (in.)	ft ³ / lbs	Model
Laminate Modesty		
14 RU rack rails. 1 Power strip		
30 x 30/36* x 41	33.1 / 404	66-LC303641LM
30 x 36/42* x 41	38.3 / 434	66-LC304241LM
36 x 30/36* x 41	39.1 / 435	66-LC363641LM
36 x 36/42* x 41	45.5 / 505	66-LC364241LM
Perforated Metal Modesty		
14 RU rack rails. 1 Power strip		
30 x 30/36* x 41	33.1 / 404	66-LC303641MM
30 x 36/42* x 41	38.3 / 434	66-LC304241MM
36 x 30/36* x 41	39.1 / 435	66-LC363641MM
36 x 36/42* x 41	45.5 / 505	66-LC364241MM

*Chassis width / Top width

Storage Dimensions:

30" W Unit: Rack rails on left side of storage area - 19 1/4" W. Remaining space is 8 5/8" W


36" W Unit: Left compartment - 13 5/8" W. Right compartment w/ rack rails - 19 1/4" W

Standard Features

- iMod™ wire management
- Locking Front Access Doors
- Heavy Duty Locking Casters
- Powerstrip
- Laminate or metal modesty panel
- 14 Rack Units Front & Rear
- Ships Fully Assembled (Casters Field Installed)

Color Options


Base Color Options

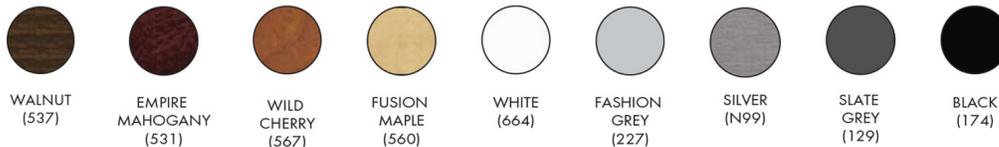

Worksurface Color Options




Metallic Color Options (for Metal Modesty)

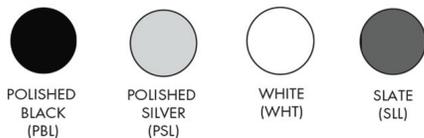

Options & Accessories

Factory Installed Accessories

Must specify location of grommet / power center at time of order

	Dimensions (in.)	Model
NOVA Keyboard Drawer 	Keyboard length to fit desk ordered. Only ordered when NO Visual Display Option is chosen 24" - 34" wide	NK
Rectangular Wire Grommet 	Rectangular black plastic grommet cover is removable for easy wire management 1 7/8" D x 3 1/4" W	WG1080
Star Cut Wire Grommet 	Round black plastic grommet with rubber star cut opening allows more cords and cables to pass through 2 3/4" Diameter	RWGSC
Pop-up Power Center 	Two grounded outlets. Fluid one touch accessibility. 6ft, 15 Amp cord. UL listed. 3 3/4" D x 5" W	11225PP
Pop-up Power / Data Center 	One grounded outlet. One opening for voice/data jack. Voice/Data Adapter Kit (included) provides adapters for couplers & jacks from a variety of manufacturers. Fluid one touch accessibility. 6ft, 15 Amp cord. UL listed. 3 3/4" D x 5" W	11225PD
Pop-up Power / USB Charging Center 	One grounded outlet. One USB charging duplex. Fluid one touch accessibility. 6ft, 15 Amp cord. UL Listed. 3 3/4" D x 5" W	11225PC
Round Flush Power Center 	Two grounded outlets. Clean, flush mount. 6ft, 15 Amp cord. UL listed. 4" Diameter	3359PP
Round Flush Power / USB Charging Center 	One grounded outlet. One USB charging duplex. Clean, flush mount. 6ft, 15 Amp cord. UL Listed. 4" Diameter	3359PC
Round Power Center 	One grounded outlet. Features spill-proof technology. 6ft, 15 Amp cord. UL Listed. 2" Diameter	3825P



ASSEMBLY REQUIRED

Options for Lecterns



Surface Mount Arm
 Maximum Weight: 21 lbs
 Maximum Dimensions: Up to 24" widescreen

Model Wt(lbs) Description
With NOVA Keyboard Drawer


NOVA Keyboard Drawer installed in assembled units only.



Articulating Surface Mount Arm
 Maximum Weight: 33 lbs
 Maximum Dimensions: Up to 35" widescreen

SMA0203NK	13	SMA & NOVA Keyboard Drawer
ASMA0203NK	22	Articulating SMA & NOVA Keyboard Drawer

Flip-up Shelf

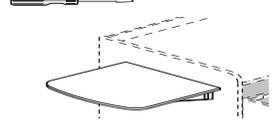

D x W x H (in.)	ft ³ / lbs	Model	List Price
-----------------	-----------------------	-------	------------

Field installed on all but Sit-Stand Lecterns. Shipped Separately. Color matches worksurface of lectern ordered. Located 3" down from worksurface. For factory prep, must specify "U" on lectern model number for left-handed, or "V" on lectern model number for right-handed placement, or "B" on lectern model number for both left and right hand placement.


For 21" D or 24" D Lectern:

Attaches to the LEFT side panel of Lectern			
20 x 20 x 1	0.9 / 24	66-SH202001L	
Attaches to the RIGHT side panel of Lectern			

For 26" D, 30" D or 36" D Lectern:

Attaches to the LEFT side panel of Lecterns			
22 x 20 x 1	1.0 / 24	66-SH222001L	
Attaches to the RIGHT side panel of Lecterns			
22 x 20 x 1	1.0 / 24	66-SH222001R	


2 Space Rack Drawer

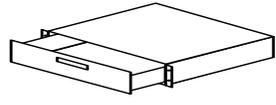

Attaches to rack rails. Takes up 2 RU space. 50 lb. weight capacity.

20 x 15 x 3 1/2	10.4 / 20	66-2DRAWER	
-----------------	-----------	------------	--


Sliding Shelf



Attaches to rack rails. 35 lb. weight capacity.

20 x 15 x 1	10.4 / 15	66-SSHELF	
-------------	-----------	-----------	--


2 Space Rack Shelf

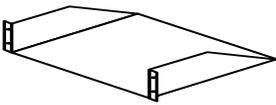

Attaches to rack rails. Takes up 2 RU space. 50 lb. weight capacity.

20 x 15 x 3 1/2	10.4 / 15	66-2SHELF	
-----------------	-----------	-----------	--

Removable Console

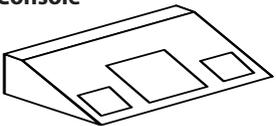

Black laminate box (Customer to provide cutouts needed)

11 x 15 x 6	2.0 / 20	66-CONSOLE01	
-------------	----------	--------------	--


Ventilation Fan



115V fan rated at 57 CFM. 30 dBA. Add (-VF) on lectern model number to be factory installed. Must also specify cutout location on lectern.

1 x 6 x 6	2.0 / 3	66-FAN	
-----------	---------	--------	--

Rack Cube



All metal construction providing front and rear Rack Rails allowing rack storage mounting prior to installation in rack storage compartment. Standard Black metal. Available with 6 RU - 14 RU; height varies by RU count. **Complete Model number replacing blank " _ " with desired RU** (Ex: 66-RRCUBE10 - 10 RU Rack Cube). **NOTE:** If ordering with a lectern, specify "-RR" at end of lectern model number. (Ex: 66-LP303047LM-RR)

19 1/8 x 19 1/2 x Varies	66-RRCUBE_		
--------------------------	------------	--	--