Curved Top AV Lecterns

with Downview

Model Number Structure

66	-	LC	305441	LM	FPA2124NK
Series		**Type**	**Size**	**Modesty Combination for**	**Visual Display Option**
66=Lectern		LP= Lectern with Curved Top	D x W x H	**Laminate modesty** LM=Laminate modesty **Perforated Metal modesty** MM=Metal modesty	FPA1621NK=16"D x 21"W Downview & NOVA Keyboard Drawer FPA1821NK=18"D x 21"W Downview & NOVA Keyboard Drawer FPA2124NK=21"D x 24"W Downview & NOVA Keyboard Drawer

NOVA SOLUTIONS™
(217) 342-7070
www.novadesk.com
sales@novasolutionsinc.com

Curved Top AV Lecterns

1. **Select model number**
   Ex: 66-LP304841LM
   (30x48x41 Curved Top AV Lectern with laminate modesty)
2. **Select laminate color for base and worksurface**
   If ordering with perforated metal modesty, select metal color
   Note: Laminate modesty will match base color.

   Ex: 567 (Base) 567 (Worksurface)

Optional Selections:

3. **Select Visual Display Options** (see page 34 of catalog)
   Ex: FPA2124NK (21"D x 24"W Downview with NOVA keyboard drawer)

28 RU rack rails

D x W x H (in.)	ft³ / lbs	Model
Laminate Modesty		
30 x 48/54* x 41	48.7 / 516	66-LC305441LM
36 x 48/54* x 41	57.9 / 576	66-LC365441LM
Perforated Metal Modesty		
30 x 48/54* x 41	48.7 / 516	66-LC305441MM
36 x 48/54* x 41	57.9 / 576	66-LC365441MM

*Chassis width / Top width

Storage Dimensions:

48" W Unit: Left compartment w/ rack rails - 25 ¾" W. Right compartment w/ rack rails - 19 ¼" W

16"D x 21"W viewport(Widescreen)

Maximum Dimensions for Widescreen: 20 1/8"W x 12 1/2" H up to 21"widescreen

24" min. worksurface depth

1B"D x21"W viewport(Widescreen)

Maximum Dimensions for Widescreen: 20 1/8"W x 14 ½"H up to 21"widescreen

26" min. worksurface depth

21" D x24"W viewport(Widescreen)

Maximum Dimensions for Widescreen: 23 1/8"W x 19"H up to 24" widescreen

30" min. worksurface depth 36" min. worksurface width

- Tinted, tempered glass viewport
- Keeps monitor under glass below worksurface
- Ergonomic viewing angle

Model	Wt(lb,)	Description
With NOVA Keyboard Drawer		
Downview™ & NOVA Keyboard Drawer installed in assembled units only. Optional Privacy/Glare visor sold separately, see page 60 for pricing.		
FPA1621NK	35	16"Dx21"W Downview™ &NOVA Keyboard Drawer
FPA1821NK	35	18"Dx21"W Downview™ &NOVA Keyboard Drawer
FPA2124NK	39	21"Dx24"W Downview™ &NOVA Keyboard Drawer

Standard Features

- iMod™ wire management
- Locking Front Access Doors
- Heavy Duty Locking Casters
- Powerstrip
- Laminate or metal modesty panel
- 14 Rack Units Front & Rear
- Ships Fully Assembled (Casters Field Installed)

Color Options

Base Color Options

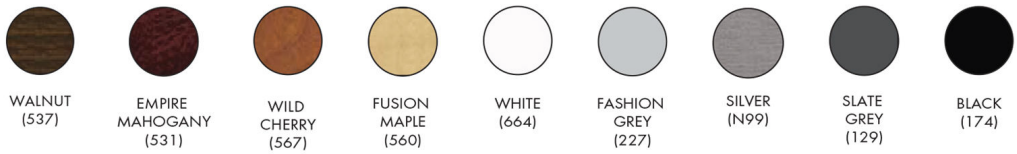

Worksurface Color Options

Metallic Color Options (for Metal Modesty)

Options & Accessories

Factory Installed Accessories

Must specify location of grommet / power center at time of order

		Dimensions (in.)	Model
NOVA Keyboard Drawer		Keyboard length to fit desk ordered. Only ordered when NO Visual Display Option is chosen	
		24" - 34" wide	NK
Rectangular Wire Grommet		Rectangular black plastic grommet cover is removable for easy wire management	
		1 7/8" D x 3 1/4" W	WG1080
Star Cut Wire Grommet		Round black plastic grommet with rubber star cut opening allows more cords and cables to pass through	
		2 3/4" Diameter	RWGSC
Pop-up Power Center		Two grounded outlets. Fluid one touch accessibility. 6ft, 15 Amp cord. UL listed.	
		3 3/4" D x 5" W	11225PP
Pop-up Power / Data Center		One grounded outlet. One opening for voice/data jack. Voice/Data Adapter Kit (included) provides adapters for couplers & jacks from a variety of manufacturers. Fluid one touch accessibility. 6ft, 15 Amp cord. UL listed.	
		3 3/4" D x 5" W	11225PD
Pop-up Power / USB Charging Center		One grounded outlet. One USB charging duplex. Fluid one touch accessibility. 6ft, 15 Amp cord. UL Listed.	
		3 3/4" D x 5" W	11225PC
Round Flush Power Center		Two grounded outlets. Clean, flush mount. 6ft, 15 Amp cord. UL listed.	
		4" Diameter	3359PP
Round Flush Power / USB Charging Center		One grounded outlet. One USB charging duplex. Clean, flush mount. 6ft, 15 Amp cord. UL Listed.	
		4" Diameter	3359PC
Round Power Center		One grounded outlet. Features spill-proof technology. 6ft, 15 Amp cord. UL Listed.	
		2" Diameter	3825P

Options for Lecterns

	D x W x H (in.)	ft³ / lbs	Model	List Price
Privacy / Glare Visor 				
	21 & 24" Wide viewports		AC-1064	
	12 x 26 1/2 x 6			
Flip-up Shelf 	**Field installed on all but Sit-Stand Lecterns. Shipped Separately. Color matches worksurface of lectern ordered. Located 3" down from worksurface. For factory prep, must specify "U" on lectern model number for left-handed, or "V" on lectern model number for right-handed placement, or "B" on lectern model number for both left and right hand placement.**			
	For 21" D or 24" D Lectern:			
	Attaches to the LEFT side panel of Lectern			
	20 x 20 x 1	0.9 / 24	66-SH202001L	
	Attaches to the RIGHT side panel of Lectern			
	For 26" D, 30" D or 36"D Lectern:			
	Attaches to the LEFT side panel of Lecterns			
	22 x 20 x 1	1.0 / 24	66-SH222001L	
	Attaches to the RIGHT side panel of Lecterns			
	22 x 20 x 1	1.0 / 24	66-SH222001R	
2 Space Rack Drawer 	Attaches to rack rails. Takes up 2 RU space. 50 lb. weight capacity.			
	20 x 15 x 3 ½	10.4 / 20	66-2DRAWER	
Sliding Shelf 	Attaches to rack rails. 35 lb. weight capacity.			
	20 x 15 x 1	10.4 / 15	66-SSHELF	
2 Space Rack Shelf 	Attaches to rack rails. Takes up 2 RU space. 50 lb. weight capacity.			
	20 x 15 x 3 ½	10.4 / 15	66-2SHELF	
Removable Console 	Black laminate box (Customer to provide cutouts needed)			
	11 x 15 x 6	2.0 / 20	66-CONSOLE01	
Ventilation Fan	115V fan rated at 57 CFM. 30 dBA. Add (-VF) on lectern model number to be factory installed. Must also specify cutout location on lectern.			
	1 x 6 x 6	2.0 / 3	66-FAN	
Rack Cube 	All metal construction providing front and rear Rack Rails allowing rack storage mounting prior to installation in rack storage compartment. Standard Black metal. Available with 6 RU - 14 RU; height varies by RU count. **Complete Model number replacing blank "__" with desired RU** (Ex: 66-RRCUBE**10** – 10 RU Rack Cube). **NOTE:** If ordering with a lectern, specify "-RR" at end of lectern model number. (Ex: 66-LP303047LM-**RR**)			
	19 1/8 x 19 ½ x Varies		66-RRCUBE__	