

Square Top AV Lecterns

With Trolley



Model Number Structure

66	-	LS	304241	LM	TE0728NK
<u>Series</u>		<u>Type</u>	<u>Size</u>	<u>Modesty Combination for</u>	<u>Visual Display Option</u>
66=Lectern		LS= Lectern with Square Top	D x W x H	<u>Laminate modesty</u> LM=Laminate modesty <u>Perforated Metal modesty</u> MM=Metal modesty	TE0724NK=Trolley™ E & NOVA Keyboard Drawer TE0728NK=Trolley™ EXL & NOVA Keyboard Drawer



(217) 342-7070

www.novadesk.com

sales@novasolutionsinc.com

Square Top AV Lecterns

1. Select model number

Ex: 66-LS304241LM
(30x42x41 Square Top AV Lectern with laminate modesty)

2. Select laminate color for base and worksurface


If ordering with perforated metal modesty, select metal color

Note: Laminate modesty will match base color.

Ex: $\frac{567}{\text{Base}}$ $\frac{567}{\text{Worksurface}}$

Optional Selections:

3. Select Visual Display Options (see page 34) Ex: TE0728NK (The Trolley™ EXL with NOVA keyboard drawer)




28 Rack Units

D x W x H (in.)	ft ³ / lbs	Model
Laminate Modesty		
30 x 42 x 41	38.3 / 434	66-LS304241LM
36 x 42 x 41	45.5 / 505	66-LS364241LM
Perforated Metal Modesty		
30 x 42 x 41	38.3 / 434	66-LS304241MM
36 x 42 x 41	45.5 / 505	66-LS364241MM

Storage Dimensions:

42" W Unit: Left compartment w/ rack rails - 19 1/4" W. Right compartment w/ rack rails - 19 1/4" W



The Trolley™

- Ships installed in assembled units only. Maximum distance from center of wall mount VESA plate to bottom of monitor is 6 3/4" (171mm)

The Trolley™ Maximum Dimensions for

Widescreen:

2 3/4" D x 18 1/4" W x 14 1/2" H up to 20" widescreen

The Trolley™ EXL Maximum Dimensions for

Widescreen:

2 1/2" D x 22 7/8" W x 14 1/2" H up to 24" widescreen
36" min. worksurface width

- Patented Access door automatically opens and closes with the push of a button
- Low voltage electrical motor to lift & lower monitor
- Intelligent Motion Technology™ provides operational intuition

Model	Wt(lbs)	Description
With NOVA Keyboard Drawer		
NOVA Keyboard Drawer installed in assembled units only.		
International Customers: The Trolley™ includes Universal Power Control Units, compatible with all power requirements inside and outside the U.S.		
TE0724NK	48	Trolley™ E & NOVA Keyboard Drawer
TE0728NK	48	Trolley™ EXL & NOVA Keyboard Drawer


Available with NOVA Linked™

Standard Features

- iMod™ wire management
- Locking Front Access Doors
- Heavy Duty Locking Casters
- Powerstrip
- Laminate or metal modesty panel
- 28 Rack Units
- Ships Fully Assembled (Casters Field Installed)

Color Options


Base Color Options

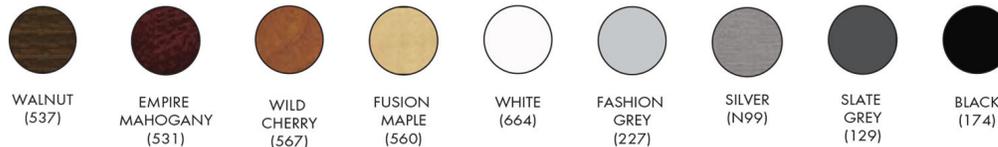

Worksurface Color Options





Metallic Color Options (for Metal Modesty)

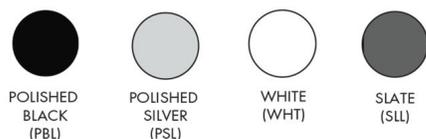


Options & Accessories

Factory Installed Accessories

Must specify location of grommet / power center at time of order


	Dimensions (in.)	Model
NOVA Keyboard Drawer 	Keyboard length to fit desk ordered. Only ordered when NO Visual Display Option is chosen 24" - 34" wide	NK
Rectangular Wire Grommet 	Rectangular black plastic grommet cover is removable for easy wire management 1 7/8" D x 3 1/4" W	WG1080
Star Cut Wire Grommet 	Round black plastic grommet with rubber star cut opening allows more cords and cables to pass through 2 3/4" Diameter	RWGSC
Pop-up Power Center 	Two grounded outlets. Fluid one touch accessibility. 6ft, 15 Amp cord. UL listed. 3 3/4" D x 5" W	11225PP
Pop-up Power / Data Center 	One grounded outlet. One opening for voice/data jack. Voice/Data Adapter Kit (included) provides adapters for couplers & jacks from a variety of manufacturers. Fluid one touch accessibility. 6ft, 15 Amp cord. UL listed. 3 3/4" D x 5" W	11225PD
Pop-up Power / USB Charging Center 	One grounded outlet. One USB charging duplex. Fluid one touch accessibility. 6ft, 15 Amp cord. UL Listed. 3 3/4" D x 5" W	11225PC
Round Flush Power Center 	Two grounded outlets. Clean, flush mount. 6ft, 15 Amp cord. UL listed. 4" Diameter	3359PP
Round Flush Power / USB Charging Center 	One grounded outlet. One USB charging duplex. Clean, flush mount. 6ft, 15 Amp cord. UL Listed. 4" Diameter	3359PC
Round Power Center 	One grounded outlet. Features spill-proof technology. 6ft, 15 Amp cord. UL Listed. 2" Diameter	3825P

Flip-up Shelf




D x W x H (in.)	ft ³ / lbs	Model	List Price
Field installed on all but Sit-Stand Lecterns. Shipped Separately. Color matches worksurface of lectern ordered. Located 3" down from worksurface. For factory prep, must specify "U" on lectern model number for left-handed, or "V" on lectern model number for right-handed placement, or "B" on lectern model number for both left and right hand placement.			
For 21" D or 24" D Lectern:			
Attaches to the LEFT side panel of Lectern			
20 x 20 x 1	0.9 / 24	66-SH202001L	
Attaches to the RIGHT side panel of Lectern			
For 26" D, 30" D or 36" D Lectern:			
Attaches to the LEFT side panel of Lecterns			
22 x 20 x 1	1.0 / 24	66-SH222001L	
Attaches to the RIGHT side panel of Lecterns			
22 x 20 x 1	1.0 / 24	66-SH222001R	

2 Space Rack Drawer




Attaches to rack rails. Takes up 2 RU space. 50 lb. weight capacity.			
20 x 15 x 3 ½	10.4 / 20	66-2DRAWER	

Sliding Shelf




Attaches to rack rails. 35 lb. weight capacity.			
20 x 15 x 1	10.4 / 15	66-SSHELF	

2 Space Rack Shelf

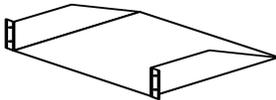

Attaches to rack rails. Takes up 2 RU space. 50 lb. weight capacity.			
20 x 15 x 3 ½	10.4 / 15	66-2SHELF	

Removable Console




Black laminate box (Customer to provide cutouts needed)			
11 x 15 x 6	2.0 / 20	66-CONSOLE01	

Ventilation Fan



115V fan rated at 57 CFM. 30 dBA. Add (-VF) on lectern model number to be factory installed. Must also specify cutout location on lectern.			
1 x 6 x 6	2.0 / 3	66-FAN	

Rack Cube



All metal construction providing front and rear Rack Rails allowing rack storage mounting prior to installation in rack storage compartment. Standard Black metal. Available with 6 RU - 14 RU; height varies by RU count. Complete Model number replacing blank " _ " with desired RU (Ex: 66-RRCUBE10 - 10 RU Rack Cube). NOTE: If ordering with a lectern, specify "-RR" at end of lectern model number. (Ex: 66-LP303047LM-RR)			
19 1/8 x 19 ½ x Varies		66-RRCUBE_	