

Square Top AV Lecterns

With Downview



Model Number Structure

<u>Series</u>	<u>Type</u>	<u>Size</u>	<u>Modesty Combination for</u>	<u>Visual Display Option</u>
66=Lectern	LS= Lectern with Square Top	D x W x H	Laminate modesty LM=Laminate modesty Perforated Metal modesty MM=Metal modesty	FPA1621NK=16"D x 21"W Downview & NOVA Keyboard Drawer FPA1821NK=18"D x 21"W Downview & NOVA Keyboard Drawer FPA2124NK=21"D x 24"W Downview & NOVA Keyboard Drawer


 (217) 342-7070
www.novadesk.com
sales@novasolutionsinc.com

Square Top AV Lecterns

1. Select model number

Ex: 66-LS304841LM
(30x48x41 Square Top AV Lectern with laminate modesty)

2. Select laminate color for base and worksurface

If ordering with perforated metal modesty, select metal color


Note: Laminate modesty will match base color.

Ex: 567 567
Base Worksurface

Optional Selections:

3. Select Visual Display Options (see page 34 of catalog)

Ex: FPA2124NK (21"D x 24"W Downview with NOVA keyboard drawer) - Lectern will grow 2" in width when ordered with FPA2124



28 RU rack rails

D x W x H (in.)	ft ³ / lbs	Model
Laminate Modesty		
30 x 48 x 41	43.5 / 498	66-LS304841LM
36 x 48 x 41	51.7 / 550	66-LS364841LM
Perforated Metal Modesty		
30 x 48 x 41	43.5 / 498	66-LS304841MM
36 x 48 x 41	51.7 / 550	66-LS364841MM

Perforated Metal Modesty

Storage Dimensions:

48" W Unit: Left compartment w/ rack rails - 25 3/4" W. Right compartment w/ rack rails - 19 1/4" W

16" D x 21" W viewport (Widescreen) Maximum Dimensions for Widescreen: 20 1/8" W x 12 1/2" H up to 21" widescreen	18" D x 21" W viewport (Widescreen) Maximum Dimensions for Widescreen: 20 1/8" W x 14 1/2" H up to 21" widescreen
---	---

24" min. worksurface depth	26" min. worksurface depth
----------------------------	----------------------------

21" D x 24" W viewport (Widescreen) Maximum Dimensions for Widescreen: 23 1/8" W x 19" H up to 24" widescreen	<ul style="list-style-type: none"> Tinted, tempered glass viewport Keeps monitor under glass below worksurface Ergonomic viewing angle
---	---

30" min. worksurface depth
36" min. worksurface width

Model Wt(lbs) Description

With NOVA Keyboard Drawer

Downview™ & NOVA Keyboard Drawer installed in assembled units only. Optional Privacy/Glare visor sold separately, see page 60 for pricing.

FPA1621NK	35	16" D x 21" W Downview™ & NOVA Keyboard Drawer
-----------	----	--

FPA1821NK	35	18" D x 21" W Downview™ & NOVA Keyboard Drawer
-----------	----	--

FPA2124NK	39	21" D x 24" W Downview™ & NOVA Keyboard Drawer
-----------	----	--

Standard Features

- iMod™ wire management
- Locking Front Access Doors
- Heavy Duty Locking Casters
- Powerstrip
- Laminate or metal modesty panel
- 28 Rack Units
- Ships Fully Assembled (Casters Field Installed)

Color Options


Base Color Options



Worksurface Color Options





Metallic Color Options (for Metal Modesty)

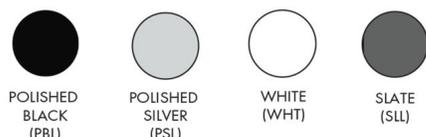

Options & Accessories

Factory Installed Accessories

Must specify location of grommet / power center at time of order

	Dimensions (in.)	Model
NOVA Keyboard Drawer 	Keyboard length to fit desk ordered. Only ordered when NO Visual Display Option is chosen 24" - 34" wide	NK
Rectangular Wire Grommet 	Rectangular black plastic grommet cover is removable for easy wire management 1 7/8" D x 3 1/4" W	WG1080
Star Cut Wire Grommet 	Round black plastic grommet with rubber star cut opening allows more cords and cables to pass through 2 3/4" Diameter	RWGSC
Pop-up Power Center 	Two grounded outlets. Fluid one touch accessibility. 6ft, 15 Amp cord. UL listed. 3 3/4" D x 5" W	11225PP
Pop-up Power / Data Center 	One grounded outlet. One opening for voice/data jack. Voice/Data Adapter Kit (included) provides adapters for couplers & jacks from a variety of manufacturers. Fluid one touch accessibility. 6ft, 15 Amp cord. UL listed. 3 3/4" D x 5" W	11225PD
Pop-up Power / USB Charging Center 	One grounded outlet. One USB charging duplex. Fluid one touch accessibility. 6ft, 15 Amp cord. UL Listed. 3 3/4" D x 5" W	11225PC
Round Flush Power Center 	Two grounded outlets. Clean, flush mount. 6ft, 15 Amp cord. UL listed. 4" Diameter	3359PP
Round Flush Power / USB Charging Center 	One grounded outlet. One USB charging duplex. Clean, flush mount. 6ft, 15 Amp cord. UL Listed. 4" Diameter	3359PC
Round Power Center 	One grounded outlet. Features spill-proof technology. 6ft, 15 Amp cord. UL Listed. 2" Diameter	3825P



ASSEMBLY REQUIRED

Options for Lecterns


D x W x H (in.)	ft ³ / lbs	Model
-----------------	-----------------------	-------

Privacy / Glare Visor



21 & 24" Wide viewports		AC-1064
12 x 26 1/2 x 6		

Flip-up Shelf



Field installed on all but Sit-Stand Lecterns. Shipped Separately. Color matches worksurface of lectern ordered. Located 3" down from worksurface. For factory prep, must specify "U" on lectern model number for left-handed, or "V" on lectern model number for right-handed placement, or "B" on lectern model number for both left and right hand placement.


For 21" D or 24" D Lectern:

Attaches to the LEFT side panel of Lectern		
20 x 20 x 1	0.9 / 24	66-SH202001L
Attaches to the RIGHT side panel of Lectern		

For 26" D, 30" D or 36" D Lectern:

Attaches to the LEFT side panel of Lecterns		
22 x 20 x 1	1.0 / 24	66-SH222001L
Attaches to the RIGHT side panel of Lecterns		
22 x 20 x 1	1.0 / 24	66-SH222001R


2 Space Rack Drawer



Attaches to rack rails. Takes up 2 RU space. 50 lb. weight capacity.

20 x 15 x 3 1/2	10.4 / 20	66-2DRAWER
-----------------	-----------	------------


Sliding Shelf



Attaches to rack rails. 35 lb. weight capacity.

20 x 15 x 1	10.4 / 15	66-SSHELF
-------------	-----------	-----------


2 Space Rack Shelf



Attaches to rack rails. Takes up 2 RU space. 50 lb. weight capacity.

20 x 15 x 3 1/2	10.4 / 15	66-2SHELF
-----------------	-----------	-----------

Removable Console



Black laminate box (Customer to provide cutouts needed)

11 x 15 x 6	2.0 / 20	66-CONSOLE01
-------------	----------	--------------


Ventilation Fan



115V fan rated at 57 CFM. 30 dBA. Add (-VF) on lectern model number to be factory installed. Must also specify cutout location on lectern.

1 x 6 x 6	2.0 / 3	66-FAN
-----------	---------	--------

Rack Cube



All metal construction providing front and rear Rack Rails allowing rack storage mounting prior to installation in rack storage compartment. Standard Black metal. Available with 6 RU - 14 RU; height varies by RU count. Complete Model number replacing blank "___" with desired RU (Ex: 66-RRCUBE10 - 10 RU Rack Cube). NOTE: If ordering with a lectern, specify "-RR" at end of lectern model number. (Ex: 66-LP303047LM-RR)

19 1/8 x 19 1/2 x Varies		66-RRCUBE___
--------------------------	--	--------------