

Privacy Sides AV Lecterns

with Trolley



Model Number Structure

<u>Series</u>	<u>Type</u>	<u>Size</u>	<u>Modesty Combination for</u>	<u>Visual Display Option</u>
66=Lectern	LP= Lectern with Privacy Sides	D x W x H	<p>Laminate modesty LM=Laminate modesty</p> <p>Perforated Metal modesty MM=Metal modesty</p>	<p>TE0724NK=Trolley™ E & NOVA Keyboard Drawer</p> <p>TE0728NK=Trolley™ EXL & NOVA Keyboard Drawer</p>


 (217) 342-7070
www.novadesk.com
sales@novasolutionsinc.com

Privacy Sides AV Lecterns

1. Select model number

Ex: 66-LP303647LM
(30x36x47 Privacy Sides AV Lectern with laminate modesty)

2. Select laminate color for base and worksurface

If ordering with perforated metal modesty, select metal color

Note: Laminate modesty will match base color.


Ex: 567 567
Base Worksurface

Optional Selections:

3. Select Visual Display Options (see page 34) Ex: TE0728NK (The Trolley™ EXL with NOVA keyboard drawer)

Available with most Visual Display Options

(30" W lecterns are not available with Trolley™ EXL or 21x24 Downview™)



14 RU rack rails

D x W x H (in.) ft³ / lbs Model

Laminate Modesty

D x W x H (in.)	ft ³ / lbs	Model
14 RU rack rails. 1 Power strip		
30 x 30 x 47 7/8	30.5 / 404	66-LP303047LM
30 x 36 x 47 7/8	36.2 / 425	66-LP303647LM
36 x 30 x 47 7/8	36.2 / 425	66-LP363047LM
36 x 36 x 47 7/8	43.0 / 497	66-LP363647LM


Perforated Metal Modesty

D x W x H (in.)	ft ³ / lbs	Model
14 RU rack rails. 1 Power strip		
30 x 30 x 47 7/8	30.5 / 404	66-LP303047MM
30 x 36 x 47 7/8	36.2 / 425	66-LP303647MM
36 x 30 x 47 7/8	36.2 / 425	66-LP363047MM
36 x 36 x 47 7/8	43.0 / 497	66-LP363647MM

Storage Dimensions:

30" W Unit: Rack rails on left side of storage area - 19 1/4" W. Remaining space is 8 5/8" W

36" W Unit: Left compartment - 13 5/8" W. Right compartment w/ rack rails - 19 1/4" W



The Trolley™

- Ships installed in assembled units only. Maximum distance from center of
- wall mount VESA plate to bottom of monitor is 6 3/4" (171mm)

The Trolley™ Maximum Dimensions for

Widescreen:
2 1/2" D x 18 1/4" W x 14 1/2" H up to
20" widescreen

The Trolley™ EXL Maximum Dimensions for

Widescreen:
2 1/2" D x 22 7/8" W x 14 1/2" H up to
24" widescreen
36" min. worksurface width

Model Wt(lbs) Description

With NOVA Keyboard Drawer

NOVA Keyboard Drawer installed in assembled units only.

International Customers: The Trolley™ includes Universal Power Control Units, compatible with all power requirements inside and outside the U.S.

TE0724NK 48 Trolley™ E & NOVA Keyboard Drawer

TE0728NK 48 Trolley™ EXL & NOVA Keyboard Drawer

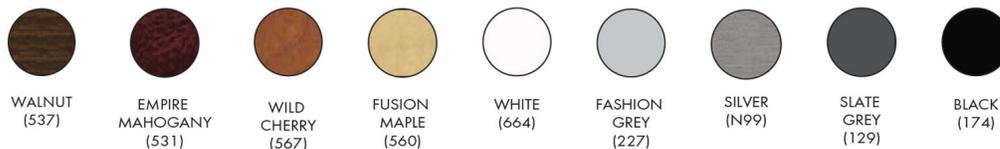
Available with NOVA Linked™

Standard Features

- iMod™ wire management
- Locking Front Access Doors
- Heavy Duty Locking Casters
- Powerstrip
- Laminate or metal modesty panel
- 14 Rack Units
- Ships Fully Assembled (Casters Field Installed)
- Privacy Sides

Color Options


Base Color Options



Worksurface Color Options



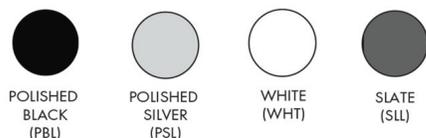
Metallic Color Options (for Metal Modesty)









Options & Accessories

Factory Installed Accessories

Must specify location of grommet / power center at time of order

	Dimensions (in.)	Model
NOVA Keyboard Drawer 	Keyboard length to fit desk ordered. Only ordered when NO Visual Display Option is chosen 24" - 34" wide	NK
Rectangular Wire Grommet 	Rectangular black plastic grommet cover is removable for easy wire management 1 7/8" D x 3 1/4" W	WG1080
Star Cut Wire Grommet 	Round black plastic grommet with rubber star cut opening allows more cords and cables to pass through 2 3/4" Diameter	RWGSC
Pop-up Power Center 	Two grounded outlets. Fluid one touch accessibility. 6ft, 15 Amp cord. UL listed. 3 3/4" D x 5" W	11225PP
Pop-up Power / Data Center 	One grounded outlet. One opening for voice/data jack. Voice/Data Adapter Kit (included) provides adapters for couplers & jacks from a variety of manufacturers. Fluid one touch accessibility. 6ft, 15 Amp cord. UL listed. 3 3/4" D x 5" W	11225PD
Pop-up Power / USB Charging Center 	One grounded outlet. One USB charging duplex. Fluid one touch accessibility. 6ft, 15 Amp cord. UL Listed. 3 3/4" D x 5" W	11225PC
Round Flush Power Center 	Two grounded outlets. Clean, flush mount. 6ft, 15 Amp cord. UL listed. 4" Diameter	3359PP
Round Flush Power / USB Charging Center 	One grounded outlet. One USB charging duplex. Clean, flush mount. 6ft, 15 Amp cord. UL Listed. 4" Diameter	3359PC
Round Power Center 	One grounded outlet. Features spill-proof technology. 6ft, 15 Amp cord. UL Listed. 2" Diameter	3825P

Options for Lecterns

	D x W x H (in.)	ft ³ / lbs	Model	List Price
Flip-up Shelf 	Field installed on all but Sit-Stand Lecterns. Shipped Separately. Color matches worksurface of lectern ordered. Located 3" down from worksurface. For factory prep, must specify "U" on lectern model number for left-handed, or "V" on lectern model number for right-handed placement, or "B" on lectern model number for both left and right hand placement.			
	For 21" D or 24" D Lectern: Attaches to the LEFT side panel of Lectern 20 x 20 x 1 0.9 / 24 66-SH202001L Attaches to the RIGHT side panel of Lectern			
For 26" D, 30" D or 36" D Lectern: Attaches to the LEFT side panel of Lecterns 22 x 20 x 1 1.0 / 24 66-SH222001L Attaches to the RIGHT side panel of Lecterns 22 x 20 x 1 1.0 / 24 66-SH222001R				
2 Space Rack Drawer 	Attaches to rack rails. Takes up 2 RU space. 50 lb. weight capacity.			
	20 x 15 x 3 ½	10.4 / 20	66-2DRAWER	
Sliding Shelf 	Attaches to rack rails. 35 lb. weight capacity.			
	20 x 15 x 1	10.4 / 15	66-SSHELF	
2 Space Rack Shelf 	Attaches to rack rails. Takes up 2 RU space. 50 lb. weight capacity.			
	20 x 15 x 3 ½	10.4 / 15	66-2SHELF	
Removable Console 	Black laminate box (Customer to provide cutouts needed)			
	11 x 15 x 6	2.0 / 20	66-CONSOLE01	
Ventilation Fan 	115V fan rated at 57 CFM. 30 dBA. Add (-VF) on lectern model number to be factory installed. Must also specify cutout location on lectern.			
	1 x 6 x 6	2.0 / 3	66-FAN	
Rack Cube 	All metal construction providing front and rear Rack Rails allowing rack storage mounting prior to installation in rack storage compartment. Standard Black metal. Available with 6 RU - 14 RU; height varies by RU count. Complete Model number replacing blank " _ " with desired RU (Ex: 66-RRCUBE10 – 10 RU Rack Cube). NOTE: If ordering with a lectern, specify "-RR" at end of lectern model number. (Ex: 66-LP303047LM-RR)			
	19 1/8 x 19 ½ x Varies		66-RRCUBE_	